



Steel Rim Catalogue (V1.5)
 Guangzhou Qiyu Auto Parts Co.,Ltd
 A Subsidiary of Galaxy Industry Germany Holdings
 www.galaauto.com

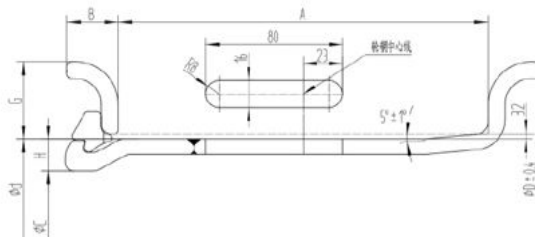


Wheel size	Recommend Tire size	Specification(mm)							Weight (KGS)	Spare Parts NO.		
		A	B	G	D	d	C	H		Rim	Side ring	Lock ring
5.0-15	7.00-15/5.0	127	16.5	28	387.4	381	337	22	21.2	JJ1505001103QS	SR1115QS	LR15QS
5.5-15	7.00-15/5.5	139.5	17.5	30.5	387.4	381	337	22	22	JJ1555001203QS	SR1215QS	LR15QS
6.0-15	8.25-15/6.0	152.5	19	33	387.4	381	337	22	24	JJ1506001303QS	SR1315QS	LR15QS
6.5-15	7.50-15/6.5	165.5	20	35.5	387.4	381	337	22	25.5	JJ1506501403QS	SR1415QS	LR15QS
7.0-15	250-15/7.0	178	21.5	38	387.4	381	337	22	28	JJ1507001503QS	SR1515QS	LR15QS
7.5-15	250-15/7.5	190.5	22.5	40.5	387.4	381	337	22	29.3	JJ1507501603QS	SR1615QS	LR15QS
8.0-15	300-15/8.0	203	24	43	387.4	381	337	22	31.4	JJ1508001703QS	SR1715QS	LR15QS
9.75-15	355/65-15	247.5	21.5	38	387.4	381	337	22	38.4	JJ1509751503QS	SR1515QS	LR15QS
6.5-20	9.00-20/6.5	165	20	35.5	514.4	508	464	22	40.6	JJ2006501403QS	SR1420QS	LR20QS
7.0-20	9.00-20/7.0	178	21.5	38	514.4	508	464	22	41.5	JJ2007001503QS	SR1520QS	LR20QS
7.5-20	10.00-20/7.5	190.5	22.5	40.5	514.4	508	464	22	45	JJ2007501603QS	SR1620QS	LR20QS
8.0-20	10.00-20/8.0	203	24	43	514.4	508	464	22	48	JJ2008001703QS	SR1720QS	LR20QS
25x10.00/1.5	11.00-20/8.5	216	25	45.5	514.4	508	464	22	51	JJ2008501803QS	SR1820QS	LR20QS
9.0-20	12.00-20/9.0	228.5	26.5	48.5	514.4	508	464	22	54	JJ200901903QS	SR1920QS	LR20QS
10.0-20	14.00-20/10.0	254	28	51	514.4	508	464	22	60	JJ2010002003QS	SR2020QS	LR20QS


17.5-25

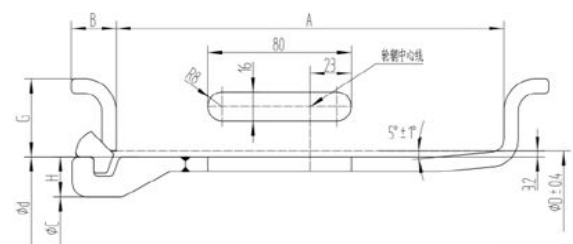

Wheel size	Recommend Tire size	Specification(mm)							Weight (KGS)	Spare Parts NO.		
		A	B	G	D	d	C	H		Rim	Side ring	Lock ring
8.5-24	11.00-24/8.5	216	25	45.5	616	609.6	464	22	61	JJ24085001803QS	SR1820QS	LR24QS
10.0-24	14.00-2/10.0	254	28	51	616	609.6	464	22	72	JJ2410002003QS	SR2020QS	LR24QS
11.75-24	16.00-24/11.75	298.5	28	45.5	616	609.6	464	22	82	JJ2411751803QS	SR1820QS	LR24QS
7.5-20	10.00-20/7.5	190.5	22.5	40.5	514.4	508	470	19	43	JJ2007501603WI	SR1620WI	LR20WI
8.0-20	10.00-20/8.0	203	24	43	514.4	508	470	19	45.6	JJ2008001703WI	SR1720WI	LR20WI
8.5-20	11.00-20/8.5	216	25	45.5	514.4	508	470	19	48.4	JJ2008501803WI	SR1820WI	LR20WI
9.0-20	12.00-20/9.0	228.5	26.5	48.5	514.4	508	470	19	51.3	JJ200901903WI	SR1920WI	LR20WI
10.0-20	14.00-20/10.0	254	28	51	514.4	508	470	19	57	JJ2010002003WI	SR2020WI	LR20WI
8.5-24	11.00-24/8.5	216	25	45.5	616	609.6	470	19	59	JJ24085001803WI	SR1820WI	LR20WI
10.0-24	14.00-2/10.0	254	28	51	616	609.6	470	19	68	JJ2410002003WI	SR2020WI	LR20WI

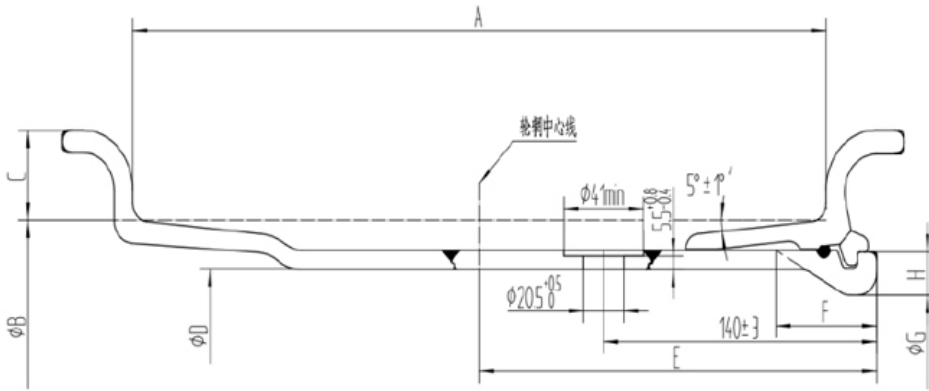


Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.		
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring
20-10.00/1.7	14.00-20	254	514.4	43	473	140.2	51.6	476.4	18.2	54.4	JJ2010001703T	FL1720T	LR20T
21-10.00/1.7	14.00-21	254	533.4	43	492	140.2	51.6	495.4	18.2	57.3	JJ2110001703T	FL1721T	LR21T
21-18.00/1.5	24.00-21	475.2	533.4	38.1	492	250.8	51.6	495.4	18.2	78	JJ2118001503T	FL1521T	LR21T
24-10.00/1.7	14.00-24	254	614.4	43	574	140.2	51.6	551	18.2	66.3	JJ2410001703T	FL1724T	LR24T
25-10.00/1.5	14.00-25	254	635	38.1	593.6	140.2	51.6	597	18.2	68.5	JJ2510001503T	FL1525T	LR25T
25-14.00/1.5	17.50-25	381	635	38.1	593.6	203.7	51.6	597	18.2	82	JJ2514001503T	FL1525T	LR25T
25-17.00/1.7	20.50-25	430	635	43	568.2	228.2	51.6	597	18.2	87	JJ2717001703T	FL1725T	LR25T
25-30.00/1.5	67x34.00-25	762	635	38.1	593.6	394.2	51.6	597	18.2	128	JJ2530001503T	FL1525T	LR25T
25-36.00/1.5	66x44.00-25	914.4	635	38.1	593.6	470.4	51.6	597	18.2	143	JJ2536001503T	FL1525T	LR25T

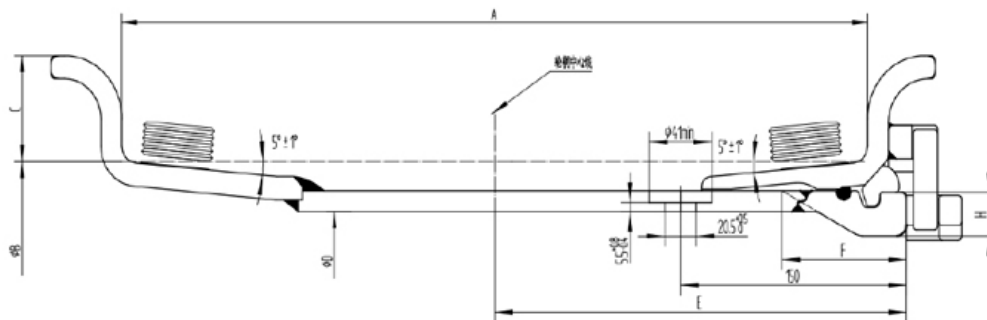


Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.		
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring
20-7.5/1.7	10.00-20	190.5	514.4	43	469	122	72.3	443	22.2	46	JJ2007501703QS	FL1720QS	LR20QS
20-10.0/1.7	14.00-20	254	514.4	43	469	143	72.3	443	22.2	58	JJ2010001703QS	FL1720QS	LR20QS
20-11.25/2.0	16.00-20	286	514.4	51	469	170	72.3	443	22.2	67	JJ2011252003QS	FL2020QS	LR20QS
25-17.00/2.0	20.50-25	430	635	51	574.6	240.9	82.7	597	26.2	165	JJ2517002003EM	FL2025EM	LR25EM
25-19.50/2.5	23.50-25	495	635	51	574.6	273.4	82.7	597	26.2	186	JJ2519502503EM	FL2525EM	LR25EM
25-22.00/3.0	26.50-25	559	635	76.2	574.6	305.4	82.7	597	26.2	215	JJ2522003003EM	FL3025EM	LR25EM
25-24.00/3.0	30/65-25	609.6	635	76.2	574.6	330.7	82.7	597	26.2	225	JJ2524003003EM	FL3025EM	LR25EM
25-25.00/3.5	29.50-25	635	635	88.9	574.6	343.4	82.7	597	26.2	257	JJ2525003503EM	FL3525EM	LR25EM

Steel Rim Catalogue (V1.5)
 Guangzhou Qiyu Auto Parts Co.,Ltd
 A Subsidiary of Galaxy Industry Germany Holdings
 www.galaauto.com

5PCS TUBELESS STEEL RIM

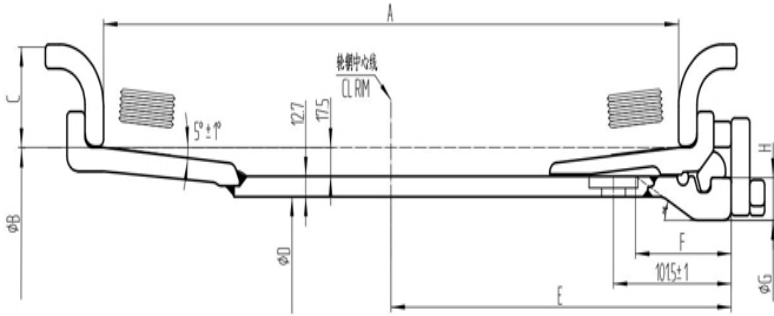


Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring	
25x10.00/1.5	14.00-25	254	635	38.1	574.6	173.3	82.7	546	27	125	JJ2510001505E M	SR1525EM	BS25EMS 01	LR25EM
25x11.25/2.0	16.00-25	285.8	635	50.8	574.6	185.7	82.7	546	27	136	JJ2511252005E M	SR2025EM	BS25EMS 01	LR25EM
25x13.00/2.5	18.00-25	330.2	635	63.5	574.6	211.4	82.7	546	27	166	JJ2513002505E M	SR2525EM	BS25EMS 01	LR25EM
25x14.00/1.5	17.5-25	356	635	38.1	574.6	224.1	82.7	546	27	153	JJ2514001505E M	SR2155EM	BS25EMS 01	LR25EM
25x15.00/3.0	21.00-25	381	635	76.2	574.6	236.5	82.7	546	27	188	JJ2515003005E M	SR3025EM	BS25EMS 01	LR25EM
25x17.00/2.0	20.5-25	431.8	635	50.8	574.6	262	82.7	546	27	167	JJ2517002005E M	SR2025EM	BS25EMS 01	LR25EM
25x19.50/2.5	23.5-25	495.3	635	63.5	574.6	293	82.7	546	27	195	JJ2519502505E M	SR2025EM	BS25EMS 01	LR25EM
33x13.00/2.5	18.00-33	330.2	838.2	63.5	574.6	211.4	82.7	749.2	27	223	JJ3313002505E M	SR2533EM	BS33EMS 01	LR33EM


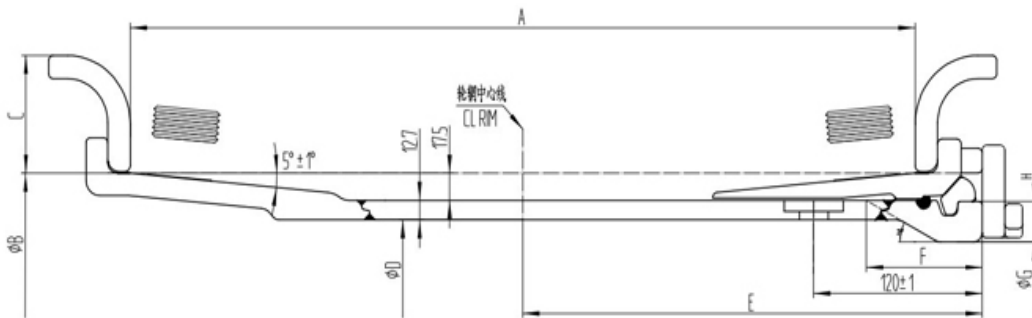



Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring	
25x13.00/2.5	18.00-25	330.2	635	63.5	574.6	211.4	82.7	546	27	178	JJ2513002505E M	SR2525	BS25EML0 1	LR25EM
25x15.00/3.0	21.00-25	381	635	76.2	574.6	236.5	82.7	546	27	195	JJ2515003006E M	SR3025	BS25EML0 1	LR25EM
25x22.00/3.0	26.5-25	558.8	635	76.2	574.6	328.6	82.7	546	27	223	JJ2522003005E M	SR3025	BS25EML0 1	LR25EM

25x25.00/3.5	29.5-25	635	635	88.9	574.6	363.8	82.7	546	27	243	JJ2525003505E M	SR3525	BS25EML0 1	LR25EM
25x24.00/3.0	30/65-25	610	635	76.2	574.6	352.7	82.7	546	27	234	JJ2524003005E M	SR3025	BS25EML0 1	LR25EM
29x17.00/3.5	24.00-29	431.8	736.6	88.9	676.2	263.6	82.7	647.6	27	255	JJ2917003505E M	SR3529	BS29EML0 1	LR29EM
29x22.00/3.0	26.50-29	558.8	736.6	76.2	676.2	327.1	82.7	647.6	27	273	JJ2922003005E M	SR3029	BS29EML0 1	LR29EM
33x13.00/2.5	18.00-33	330.2	838.2	62.5	777.8	212.8	82.7	803.2	27	225	JJ3313002505E M	SR2533	BS33EML0 1	LR33EM
33x17.00/3.5	24.00-33	431.8	838.2	88.9	777.8	263.6	82.7	803.2	27	283	JJ3317003505E M	SR3533	BS33EML0 1	LR33EM
33x28.00/3.5	35/65-33	711.2	838.2	88.9	777.8	403.3	82.7	803.2	27	347	JJ3328003505E M	SR3533	BS33EML0 1	LR33EM
35x15.00/3.0	18.00-35	381	889	76.2	828.6	238.2	82.7	854	27	276	JJ3513003005E M	SR3035	BS35EML0 1	LR35EM


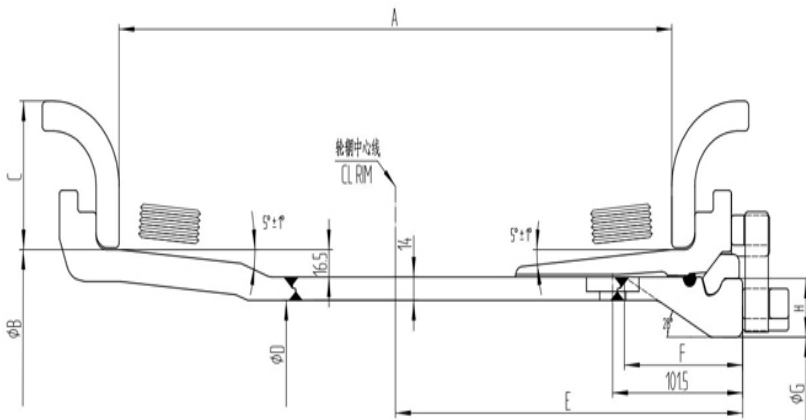


Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring	
35x17.00/3.5	21.00-35	431.8	889	88.9	828.6	263.6	82.7	854	27	309	JJ3517003505E M	SR3535	BS35EML0 1	LR35EM
29x17.00/3.5	24.00-29	431.8	736.6	88.9	676.2	261.9	90.6	631.8	35.1	256	JJ2917003505E M	SR3529	BS29EML0 1	LR29EM
29x22.00/3.0	26.50-29	558.8	736.6	76.2	676.2	328.6	90.6	631.8	35.1	273	JJ2922003005E M	SR3029	BS29EML0 1	LR29EM
29x24.00/3.0	30/65-29	609.6	736.6	76.2	676.2	355.2	90.6	631.8	35.1	289	JJ2924003005E M	SR3029	BS29EML0 1	LR29EM
29x24.00/3.5	26.5-29	609.6	736.6	88.9	676.2	355.2	90.6	631.8	35.1	204	JJ2924003505E M	SR3529	BS29EML0 1	LR29EM
29x25.00/3.5	29.5-29	635	736.6	88.9	676.2	363.5	90.6	631.8	35.1	301	JJ2925003505E M	SR3529	BS29EML0 1	LR29EM
33x13.00/2.5	18.00-33	330.2	838.2	62.5	777.8	205.6	90.6	733.4	35.1	253	JJ3313002505E M	SR2533	BS33EML0 1	LR33EM
33x17.00/3.5	24.00-33	431.8	838.2	88.9	777.8	261.9	90.6	733.4	35.1	282	JJ3317003505E M	SR3533	BS33EML0 1	LR33EM
33x28.00/3.5	35/65-33	711.2	838.2	88.9	777.8	405.7	90.6	733.4	35.1	328	JJ3328003505E M	SR3533	BS33EML0 1	LR33EM
35x15.00/3.0	18.00-35	381	889	76.2	828.6	236.5	90.6	784.2	35.1	292	JJ3513003005E M	SR3035	BS35EML0 1	LR35EM
35x17.00/3.5	21.00-35	431.8	889	88.9	828.6	261.9	90.6	784.2	35.1	323	JJ3517003505E M	SR3535	BS35EML0 1	LR35EM

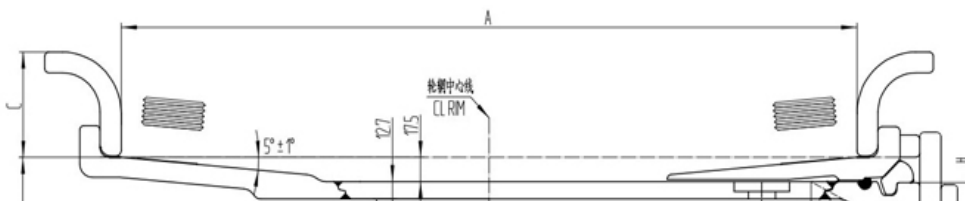


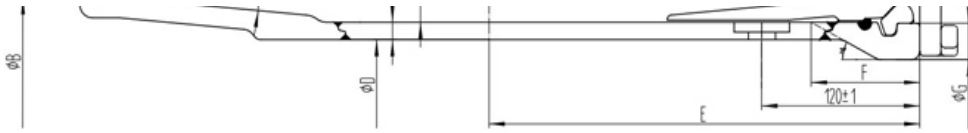


Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring		Lock ring
33x13.00/2.5	18.00-33	330.2	838.2	63.5	777.2	220.4	90.6	768	35.1	251	V	SR2533	BS33EV	LR33EV
33x22.00/4.0	27.00-33	558.8	838.2	101.6	777.2	334.7	90.6	768	35.1	301	V	SR4033	BS33EV	LR33EV
33x28.00/3.5	35/65-33	711.2	838.2	88.9	777.2	410.9	90.6	768	35.1	327	V	SR3533	BS33EV	LR33EV
33x28.00/4.0	33.5-33	711.2	838.2	101.6	777.2	410.9	90.6	768	35.1	385	V	SR4033	BS33EV	LR33EV
35x15.00/3.0	21.00-35	381	889	76.2	828	245.8	90.6	818.8	35.1	292	V	SR3035	BS35EV	LR35EV
35x17.00/3.5	24.00-35	431.8	889	88.9	828	271.2	90.6	818.8	36.1	323	V	SR3535	BS35EV	LR35EV
35x27.00/3.5	33.25-35	685.6	889	88.9	828	398.1	90.6	818.8	36.1	528	V	SR3535	BS35EV	LR35EV
35x31.00/4.0	37.25-35	787.4	889	101.6	828	449	90.6	818.8	36.1	569	V	SR4035	BS35EV	LR35EV
39x28.00/4.0	33.5-39	711.2	990.6	101.6	929.6	410.9	90.6	920.4	36.1	493	V	SR4039	BS39EV	LR39EV
39x32.00/4.0	40/65-39	812.8	990.6	101.6	929.6	461.7	90.6	920.4	36.1	529	V	SR4039	BS39EV	LR39EV
39x32.00/4.5	41.25/70-39	812.8	990.6	114.3	929.6	461.7	90.6	920.4	36.1	562	V	SR4539	BS39EV	LR39EV
45x36.00/4.5	45/65-45	914.4	1143	114.3	1082	512.5	90.6	1020	36.1	739	V	SR4545	BS45EV	LR45EV
49x15.00/3.0	21-49	381	1245	76.2	1184	245.8	90.6	1174	36.1	457	V	SR3049	BS49EV	LR49EV
49x17.00/3.5	24-40	431.8	1245	88.9	1184	271.2	90.6	1174	36.1	489	V	SR3549	BS49EV	LR49EV
49x19.50/4.0	27.00-49	495.3	1245	101.6	1184	303	90.6	1174	36.1	537	V	SR4049	BS49EV	LR49EV
49x22.00/3.5	31/80-49	558.8	1245	114.3	1184	334.7	90.6	1174	36.1	553	V	SR4049	BS49EV	LR49EV

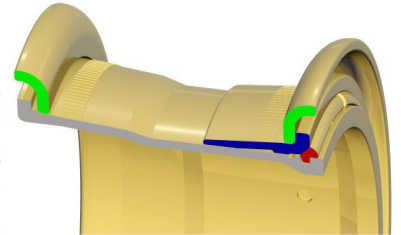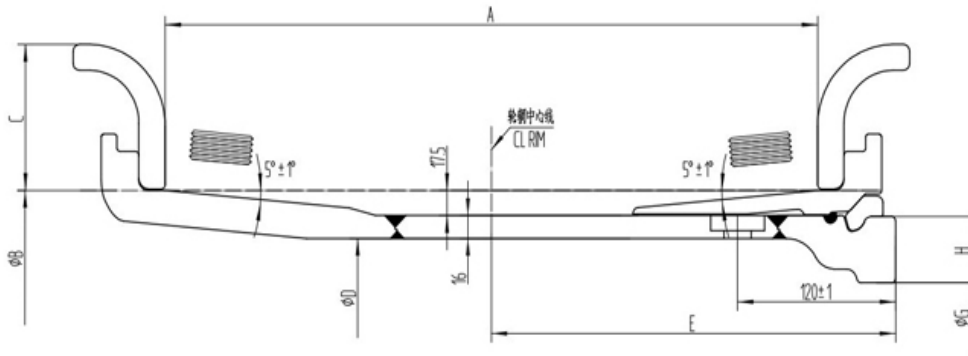

Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring		Lock ring
33x22.00/4.0	27.00-33	558.8	838.2	101.6	771.2	335		710.7	46.7	391	JJ3322004005EV	SR4033	BS33EV	LR33EV
33x28.00/3.5	35/65-33	711.2	838.2	88.9	771.2	411.1		710.7	46.7	403	JJ3328003505EV	SR3533	BS33EV	LR33EV
33x28.00/4.0	33.5-33	711.2	838.2	101.6	771.2	411.1		710.7	46.7	412	JJ3332004005EV	SR4033	BS33EV	LR33EV
33x32.00/4.5	37.5-33	812.8	838.2	88.9	771.2	464.3		710.7	46.7	452	JJ3332004505EV	SR4533	BS33EV	LR33EV
35x27.00/3.5	33.25-35	685.6	889	88.9	822	395.3		761.6	46.7	396	JJ3527003505EV	SR3535	BS35EV	LR35EV
35x31.00/4.0	37.25-35	787.4	889	101.6	822	451.6		761.6	46.7	462	JJ3531004005EV	SR4035	BS35EV	LR35EV
39x28.00/4.0	33.5-39	711.2	990.6	101.6	923.6	411.1		863.2	46.7	492	JJ3928004005EV	SR4039	BS39EV	LR39EV
39x32.00/4.0	40/65-39	812.8	990.6	101.6	923.6	464.3		863.2	46.7	529	JJ3932004005EV	SR4039	BS39EV	LR39EV
39x32.00/4.5	41.25/70-39	812.8	990.6	114.3	923.6	464.3		863.2	46.7	552	JJ3932004505EV	SR4539	BS39EV	LR39EV
45x36.00/4.5	45/65-45	914.4	1143	114.3	1076	515.1		1015.6	46.7	739	JJ4536004505EV	SR4545	BS45EV	LR45EV
49x17.00/3.5	24.00-40	431.8	1244.6	88.9	1177.6	273		1117.2	46.7	486	JJ4917003505EV	SR3549	BS49EV	LR49EV
49x19.50/4.0	27.00-49	495.3	1244.6	101.6	1177.6	304.8		1117.2	46.7	547	JJ4919504005EV	SR4049	BS49EV	LR49EV



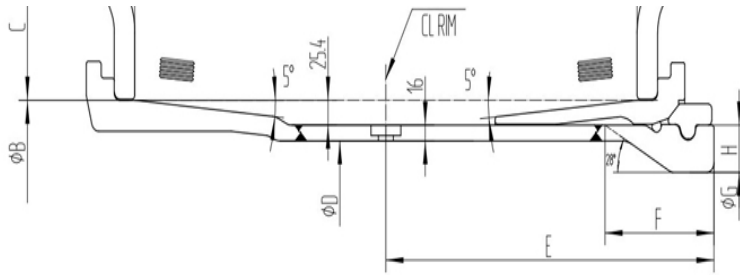

Wheel size	Recommend Tire size	Specification(mm)								Weight(KGS)	Spare Parts NO.			
		A	B	C	D	E	F	G	H		Rim	Side ring	Lock ring	
51x22.00/4.5	30.00-51	558.8	1295	114.3	1213	379.5	149	710.7	48	895	D	SR4551	BS51HD	LR51HD
51x24.00/5.0	33.00-51	609.6	1295	127	1213	404.9	149	710.7	48	963	D	SR5051	BS51HD	LR51HD
51x26.00/5.0	36.00-51	660.4	1295	127	1213	430.3	149	710.7	48	975	D	SR5051	BS51HD	LR51HD
51x40.00/4.5	50/60-51	1016	1295	114.3	1213	608	149	710.7	48	1323	D	SR4551	BS51HD	LR51HD
57x27.00/6.0	37.00-57	685.8	1448	152.4	1365	443	149	761.6	48	1251	D	SR6057	BS57HD	LR57HD
57x29.00/6.0	40.00-57	736.6	1448	152.4	1365	470	149	761.6	48	1268	D	SR5057	BS57HD	LR57HD
57x32.00/5.0	44/80-57	812.8	1448	127	1365	507	149	863.2	48	1383	D	SR5057	BS57HD	LR57HD
57x32.00/6.0	46/90-57	812.8	1448	152.4	1365	512	149	863.2	48	1401	D	SR6057	BS57HD	LR57HD
57x32.00/6.5	48/95-57	812.8	1448	165.1	1365	512	149	863.2	48	1422	D	SR6557	BS57HD	LR57HD
57x34.00/6.0	50/90-57	863.6	1448	152.4	1365	534.4	149	1016	48	1635	D	SR6057	BS57HD	LR57HD
57x36.00/6.0	50/80-57	914.4	1448	152.5	1365	584.2	149	1117	48	1538	D	SR6057	BS57HD	LR57HD
57x44.00/5.0	55/80-57	1118	1448	127	1365	685.8	149	1117	48	1837	D	SR5057	BS57HD	LR57HD
57x44.00/6.0	55.5/80-57	1118	1448	152.4	1365	685.8	149	1117	48	1913	D	SR6057	BS57HD	LR57HD
57x47.00/5.0	60/85-57	1194	1448	127	1365	701	149	1117	48	1851	D	SR5057	BS57HD	LR57HD
57x47.00/6.0	58/85-57	1194	1448	152.4	1365	701	149	1117	48	1866	D	SR6057	BS57HD	LR57HD


OTHER LOADER WHEEL RIM



Wheel Size	Offset	Center Hole	P.C.D	Bolt Hole	Rec, Tyre
7x12	0	161	205	6-Φ17	10.0-12
10.5X12	10	66	114	5- Φ16	26.0/8-12
7x15	10	60	114	4-Φ16	27x8.5-15
8x15	0	161	205	6-Φ20.5	27x10.5-15
9x15	0	140	190	6-Φ20.5	27x11-15
10x15	0	140	190	6-Φ20.5	27x12-15
13X15	10	161	205	6- Φ17	31*15.5-15
9X15.3	0	161	205	6- Φ17	11.00/12.00-15.3
25x10.00/1.5	10	161	205	6- Φ17	400/50-15.3
13X15.5	10	163	222.25	6- Φ17	400/60-15.3
8x16	0	161	205	6-Φ17	10.00-16
8.25x16.5	17.5-25	140	190	6-Φ20.5	10-16.5
8.25x16.5	40	151	200	8-Φ17	10-16.5
8.25x16.5	30	140	205	6- Φ15.7	10-16.5
9.75x16.5	40	151	200	8-Φ17	12-16.5
9.75x16.5	10	152	203	8-Φ17	12-16.5
9.75x16.5	25	152	203.2	8- Φ20	12-16.5
10.5x17.5	20	221	175	8-Φ17	14-17.5
10.5x17.5	60	221	275	8- Φ20	14-17.5
9X18	0	221	275	8- Φ17	11.00-18
11X18	0	221	275	8- Φ17	12.5-18
27/3.5-29	89	449	500	24- Φ24	33.25R29
13-20	32	304	360	8- Φ26	16/70-20
13x20	0	140	190	8- Φ20.5	405/70-20
13x20	20	315	380	8-Φ22	
13-24	1	354	404	12- Φ23	16/70-24
12.00X22.5	0	281	335	10- Φ26	425/65R22.5
13.00X22.5	0	281	335	10- Φ26	435/45R22.5

14.00X22.5	0	281	335	10- Φ26	445/65R22.5,435/45R22.5
16.00X22.5	0	281	335	10- Φ26	495/45R22.5
18.00X22.5	0	281	335	10- Φ26	555/60R22.5
20.00X22.5	0	281	335	10- Φ26	555/60R22.5
16x24	48	281	335	10- Φ24	19.5L-24
16x26	48	281	335	10- Φ24	18.4L-26
14x28	0	281	335	10- Φ24	16.9-28
16x30	0	281	335	10- Φ24	
14x22.5	40	281	335	10- Φ26	18X22.5

FORKLIFT WHEEL

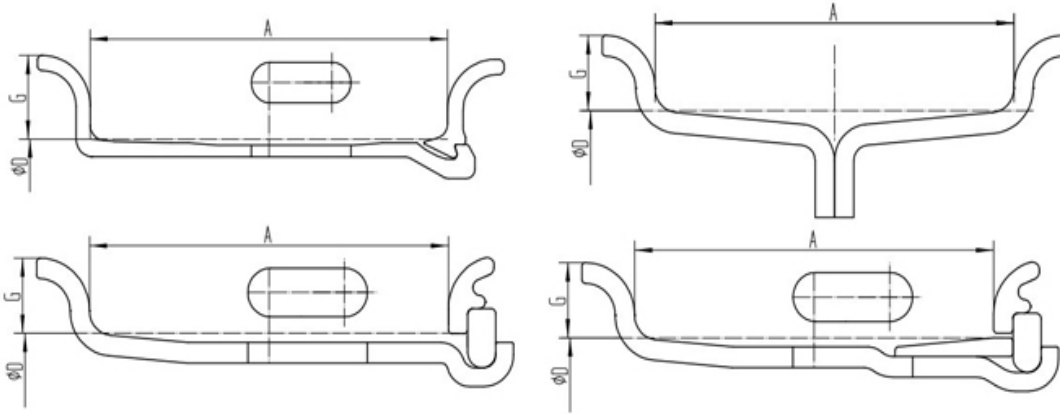

NO.	WHEEL SIZE	Recommend Tire size	RIM type	PHOTOS
25x 10.00/1.5	3.00D-8	4.00-8	SPLIT WHEEL	
2	3.00D-8	15*4 1/2-8	3PCS	
3	3.00D-8	15*4 1/2-8	4PCS	
4	17.5-25	18*7-8	SPLIT WHEEL	
5	4.33R-8	18*7-8	3PCS	
6	4.00E-09	6.00-9	SPLIT WHEEL	
7	4.00E-09	6.00-9	3PCS	
8	4.00E-09	6.00-9	4PCS	
9	5.00F-10	6.50-10	SPLIT WHEEL	
10	5.00F-10	6.50-10	3PCS	
11	5.00F-10	6.50-10	4PCS	
12	5.00S-12	7.00-12	SPLIT WHEEL	
13	6.00E-09	21*8-9	3PCS	
14	5.50F-15	7.00-15	2PCS	
15	6.50-15	8.25-15	2PCS	
16	7.00T-15	28*9-15	2PCS	
17	7.50V-15	10.00-15	2PCS	
18	8.00V-15	300-15	2PCS	
19	6.00G-16	7.50-16	2PCS	
20	5.50F-16	7.00-16	2PCS	
21	6.50-16	8.25-16	2PCS	
22	7.00T-16	9.00-16	2PCS	
23	6.50-20	8.25-20	2PCS	
24	7.00T-20	9.00-20	2PCS	

25	7.50V-20	10.00-20	2PCS
26	8.00V-20	11.00-20	2PCS
27	8.50-20	12.00-20	2PCS
28	10.00-20	14.00-20	2PCS
29	8.50-24	12.00-24	2PCS
30	10.00-24	14.00-24	2PCS



Tubeless Steel Wheels

Size	BOLT HOLES			P.C.D (mm)	B.C.D (mm)	Offset (mm)	Disc Thickness (mm)	Equipped with tyre
	No. of Holes	Hole Dia. (mm)	Hole Type					
17.5x6.00								
17.5x6.00	6	32	SR22	222.3	164	118	10/12	215/75R17.5
17.5x6.00	5	29	SR22	203.2	146	118	10/12	215/75R17.5
17.5x6.00	5	32	SR22	203.2	146	115	10/12	8R17.5
17.5x6.00	5	32	SR22	208	150	115	10/12	8R17.5
17.5x6.00	6	32	SR22	222.3	164	135	10/12	8R17.5
17.5x6.75								
17.5x6.75	6	32	SR22	222.3	164	121	10/12	9R17.5
17.5x6.75	10	26	SR18	225	176	140	10/12	9.5R17.5
17.5x6.75	6	32	SR22	222.3	163	140	10/12	9R17.5
22.5x6.75								
22.5x6.75	8	32.5	SR22	285	221	162	12/14	225/70R22.5
22.5x6.75	10	26		335	281	165	12/14	9R22.5
25x10.00/1.5	8	32	SR22	275	214	142	12/14	9R22.5
22.5x6.75	8	24	1x45°	275	221	140	12/14	9R22.5
22.5x6.75	8	32	SR22	285	221	142	12/14	9R22.5
22.5x7.50								
22.5x7.50	8	32	SR22	275	214	152	14/16	10R22.5
22.5x7.50	10	32	SR22	285.8	222	165	14/16	225/70R22.5
22.5x7.50	8	32	SR22	285	221	148	14/16	10R22.5
22.5x7.50	10	26	SR22	335	272	138	14/16	10R22.5
22.5x7.50	8	32	SR22	275	214	138.5	14/16	10R22.5
22.5x7.50	10	26	1x45°	335	281	151	14/16	10R22.5
22.5x8.25								
22.5x8.25	8	32	SR22	275	214	165	14/16	11R22.5
22.5x8.25	10	26	1x45°	335	281	151	14/16	11R22.5
22.5x8.25	10	26	SR18	335	281	151	14/16	11R22.5
22.5x8.25	10	32	SR22	285.8	222	175	14/16	275/70R22.5
22.5x8.25	10	26	SR22	335	272	151	14/16	11R22.5
22.5x8.25	8	32	SR22	285	221	151	14/16	11R22.5
22.5x8.25	10	32.5	SR22	285.8	222	169	14/16	275/80R22.5
22.5x8.25	8	32	SR22	275	214	152	14/16	11R22.5
22.5x8.25	10	26	SR18	335	275	154	14/16	11R22.5



22.5x8.25	8	32.5	SR22	285	221	169	14/16	11R22.5
22.5x8.25	10	26	1x45°	285.8	220	109	14/16	275/80R22.5

22.5x9.00

22.5x9.00	10	26		335	281	175	14/16	12R22.5
22.5x9.00	10	27	SR18	335	281	175	14/16	295/80R22.5
22.5x9.00	10	26		285.8	220	175	14/16	315/80R22.5
22.5x9.00	10	32	SR22	285.8	222	175	14/16	
22.5x9.00	10	26	1x45°	335	281	158	14/16	12R22.5
22.5x9.00	10	26	SR18	335	281	161	14/16	12R22.5
22.5x9.00	10	32	SR22	285.8	221.5	161	14/16	12R22.5
22.5x9.00	8	32.5	SR22	285	221	172	14/16	12R22.5



22.5x11.75

22.5x11.75	10	27	SR18	335	281	0	14/16	385/65R22.5
22.5x11.75	10	27	SR18	335	281	201	14/16	385/65R22.5



This wheel can be chrome.

